

LINK COAXIAL

Availability

• 1 m

• 2 m



Discover the **LINK COAXIAL** high performance digital audio cable, designed to meet the demands of audiophiles and guarantee exceptional sound quality. Perfect for use between a digital source (CD player, network player, etc.) and a preamplifier or integrated amplifier.

Key features

- **High performance shielding** : An advanced design to eliminate interference and ensure pure sound transmission.
- **99.9999% pure OCC copper** : Monocrystalline copper conductor ensures exceptional conductivity, minimising signal loss to preserve every nuance of sound.

- **Metal RCA plugs** : Sturdy, stylish plugs provide a reliable, long-lasting connection while offering premium aesthetics.
- **75 Ohms impedance** : Optimised for stable connections and optimum audio accuracy.

TECHNICAL SPECIFICATIONS

Type	75 ohms digital audio cable
Cable diameter	6.5 mm
Cable length	• 1 m • 2 m
Copper	99.9999% pure OCC copper
Sheath	Black woven nylon mesh
Connectors	RCA
EAN Code	• 1 m : 3 760 179 292 534 (L-COAX1) • 2 m : 3 760 179 292 541 (L-COAX2)
Packaging dimensions (WxHxD in mm)	175x138x42
Packaging weight (kg)	• 1 m : 0.17 • 2 m : 0.22

LINK

OPTICAL

Availability

• 1 m

• 2 m



Discover the **LINK OPTICAL** high performance digital audio cable, designed to meet the demands of audiophiles and guarantee exceptional sound quality. Perfect for use between a digital source (CD player, network player, etc.) and a preamplifier or integrated amplifier.

Key features

• **Metal Toslink plugs:** robust, stylish plugs for a reliable, long-lasting connection with a premium look.

• **PMMA fibre:** ensures stable, high performance data transmission.

TECHNICAL SPECIFICATIONS

Type	Optical digital audio cable
Cable diameter	6 mm
Cable length	• 1 m • 2 m
Conductor	PMMA
Sheath	Black woven nylon mesh
Connectors	metal Toslink
EAN Code	• 1 m : 3 760 179 292 558 (L-OPT1) • 2 m : 3 760 179 292 565 (L-OPT2)
Packaging dimensions (WxHxD in mm)	175x138x42
Packaging weight (kg)	• 1 m : 0.18 • 2 m : 0.23

LINK

RCA

Availability

• 0.5 m

• 1.5 m



Discover the **LINK RCA** high performance shielded analog audio cable, designed to meet the demands of audiophiles and guarantee exceptional quality sound reproduction. Perfect for use with amplifiers, CD players, turntables and pre-amplifiers, this cable is an essential choice for music lovers.

Key features

- **High performance shielding:** An advanced design to eliminate interference and ensure pure sound transmission.
- **50 Ohms impedance:** Optimised for stable connections and optimum audio precision.
- **Phono ground cable included:** Ideal for connecting vinyl turntables and eliminating unwanted noise.

- **Metal RCA plugs:** Durable, stylish plugs provide a reliable, long-lasting connection with a premium look.
- **99.9999% pure OCC copper:** Monocrystalline copper conductor ensures exceptional conductivity, minimising signal loss to preserve every nuance of sound.

TECHNICAL SPECIFICATIONS

Type	50 ohms analog audio cable
Cable diameter	6.5 mm
Cable length	• 2 x 0.5 m • 2 x 1.5 m
Conductor	99.9999% pure OCC
Sheath	Black woven nylon mesh
Connectors	Metal RCA
EAN Code	• 0.5 m : 3 760 179 292 497 (L-RCA0.5) • 1.5 m : 3 760 179 292 503 (L-RCA1.5)
Packaging dimensions (WxHxD in mm)	175x138x42
Packaging weight (kg)	• 0.5 m : 0.21 • 1.5 m : 0.31

LINK SPEAKER

Availability

• 3 m

• 4 m

• 5 m



Discover the **LINK SPEAKER** high performance shielded analog audio cable, designed to meet the demands of audiophiles and guarantee exceptional sound quality. Perfect for use between your power block or integrated amplifier and a pair of speakers.

Key features

• **99.9999% pure OCC copper:** The monocrystalline copper conductor ensures exceptional conductivity, minimising signal loss to preserve every nuance of sound.

• **Metal banana plugs:** Robust and stylish plugs ensure a reliable and durable connection while providing a premium aesthetic.

TECHNICAL SPECIFICATIONS

Type	High-performance audio speaker cable (pair)
Cable diameter	12.3 mm
Cable length	• 2 x 3 m • 2 x 4 m • 2 x 5 m
Conductor	99.9999% pure OCC / Cross-section 2.5 mm ²
Sheath	Black woven nylon mesh
Connectors	Metal bananas
EAN Code	• 3 m : 3 760 179 292 435 (L-LS3) • 4 m : 3 760 179 292 442 (L-LS4) • 5 m : 3 760 179 292 459 (L-LS5)
Packaging dimensions (WxHxD in mm)	• 3 m : 232x212x76 • 4 / 5 m : 252x232x100
Packaging weight (kg)	• 3 m : 1.40 • 4 m : 1.72 • 5 m : 2.10

LINK SUB

Availability

- 3 m
- 5 m
- 10 m



Discover the **LINK SUB** high performance shielded analog mono audio cable, designed to meet the demands of audio-philles and guarantee exceptional sound quality. Perfect for use between your pre-amplifier or integrated amplifier and your subwoofer.

Key features

- **High performance shielding:** An advanced design to eliminate interference and ensure pure sound transmission.
- **99.9999% pure OCC copper:** Monocrystalline copper conductor provides exceptional conductivity, minimising signal loss to preserve every nuance of sound.
- **Metal RCA plugs:** Sturdy, stylish plugs provide a reliable, long-lasting connection while offering premium aesthetics.
- **50 Ohms impedance:** Optimised for stable connections and optimum audio accuracy.

TECHNICAL SPECIFICATIONS


Type	50 ohms analog mono audio cable
Cable diameter	6.5 mm
Cable length	• 3 m • 5 m • 10 m
Conductor	99.9999% pure OCC
Sheath	Black woven nylon mesh
Connectors	Metal RCA
EAN Code	• 3 m : 3 760 179 292 466 (L-SUB3) • 5 m : 3 760 179 292 473 (L-SUB5) • 10 m : 3 760 179 292 480 (L-SUB10)
Packaging dimensions (WxHxD in mm)	• 3 / 5 m : 190x152x62 • 10 m : 234x212x75
Packaging weight (kg)	• 3 m : 0.28 • 5 m : 0.37 • 10 m : 0.67

LINK XLR

Availability

• 0.5 m

• 1.5 m

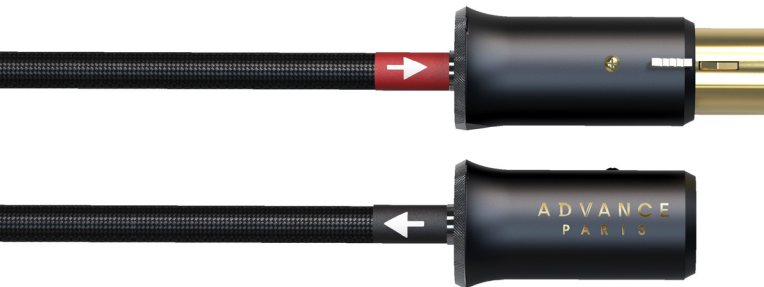

Discover the **LINK XLR** high-performance shielded analogue audio cable, specially designed for demanding music lovers looking for pure, faithful sound reproduction. Ideal for connecting amplifiers, CD players, turntables and preamplifiers, LINK XLR ensures a balanced soundstage, controlled dynamics and remarkable transparency.

Key features

- **High performance shielding:** An advanced design to eliminate interference and ensure pure sound transmission.
- **99.9999% pure OCC copper:** The monocrystalline copper conductor guarantees exceptional conductivity, minimising signal loss to preserve every nuance of sound.

- **Metal XLR connectors:** Robust, stylish connectors provide a reliable, long-lasting connection while offering premium aesthetics.
- **50 Ohms impedance:** Optimised for stable connections and optimum audio accuracy.

TECHNICAL SPECIFICATIONS

Type	50 ohms analog audio cable
Cable diameter	6.5 mm
Cable length	• 2 x 0.5 m • 2 x 1.5 m
Conductor	99.9999% pure OCC
Sheath	Black woven nylon mesh
Connectors	XLR
EAN Code	• 0.5 m : 3 760 179 292 510 (L-XLR0.5) • 1.5 m : 3 760 179 292 527 (L-XLR1.5)
Packaging dimensions (WxHxD in mm)	175x138x42
Packaging weight (kg)	• 0.5 m : 0.35 • 1.5 m : 0.44