


# Accuphase

ANALOG DISC INPUT BOARD

# AD-60

MC/MM Phono Equalizer Amplifier


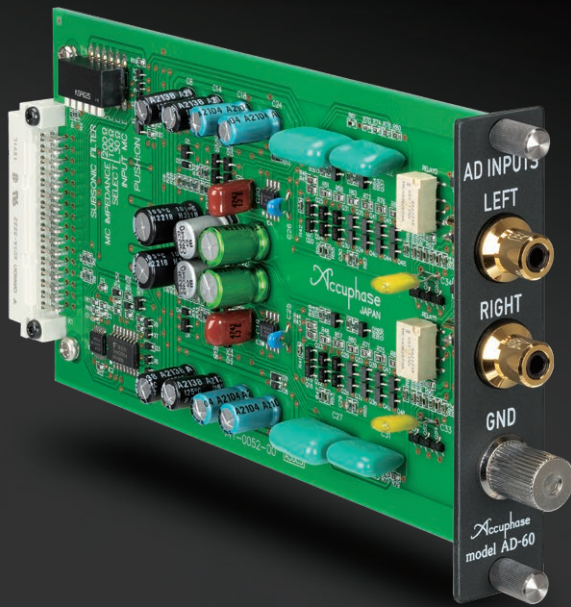


## Analog Disc Input Board

### High-performance phono equalizer amp for playback of records

The AD-60 is a high-performance, MC/MM cartridge compatible phono equalizer amp for truly enjoyable playback of analog records when installed in any Accuphase preamplifier or integrated amplifier (supported models listed below). It features the latest circuitry topology and carefully selected high-quality materials for exceptional noise suppression and superior RIAA equalization. With MC input, the most suitable impedance for the cartridge in use can be selected from 30, 100, 200 or 300 Ohms. The board also incorporates a subsonic filter to cut excessive woofer flutter caused by warped records. When installed in an amplifier with switching capabilities, the amp's front panel controls can be used for MC/MM switching, MC input impedance selection, and turning the subsonic filter on/off. The AD-60 lets true music connoisseurs enjoy the reemerging world of playing traditional records.

### Performance graphs

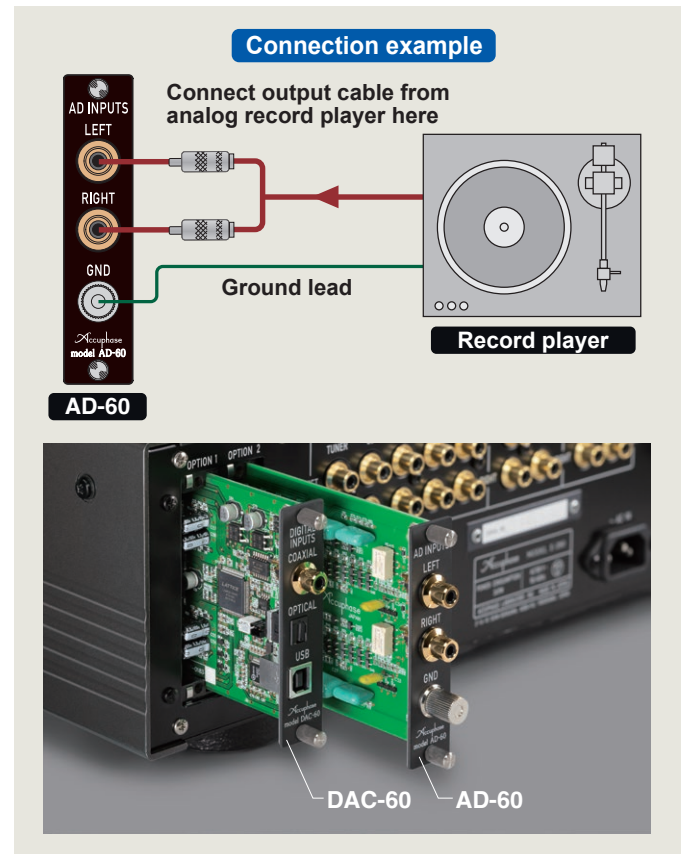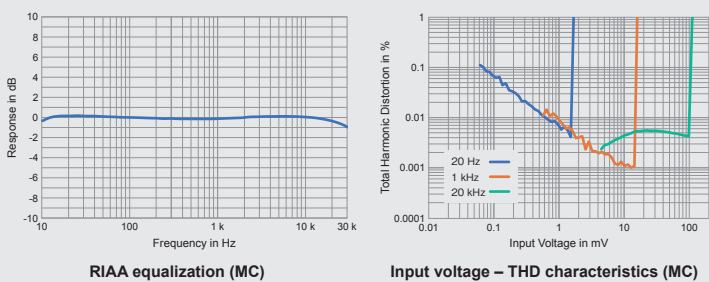

### Supported models (as of March 2023)

C-2150, C-2120, C-2110, E-800, E-5000, E-650, E-600, E-560, E-550, E-4000, E-480, E-470, E-460, E-450, E-380, E-370, E-360, E-350, E-280, E-270, E-260, E-250

MC/MM switching on the amplifier front panel. MC input impedance selection and subsonic filter on/off switching using dip switches on option board.

C-2000, C-265, C-245, CX-260, E-530, E-408, E-407, E-406V, E-308, E-307, E-306V, E-213, E-212, E-211

MC/MM switching, MC input impedance selection, and subsonic filter on/off switching using dip switches on option board.

### AD-60 Specifications

Compatible cartridges	MC and MM, switchable	
	Gain	MC
	MM	40 dB
Input impedance	MC	30/100/200/300 Ohms
	MM	47 Kilohms
Subsonic filter	25 Hz, -12 dB/octave	

# Accuphase

ACCUPHASE LABORATORY, INC.